

Flip Up Tub Seats Phenolic

Configuration:
70 Series
Phenolic

Application Use:

Architectural

Commercial

Institutional

Residential

Specifications


Folding tub seat manufactured by ELCOMA from 1" (25mm) diameter, 18 gauge, type 304 stainless steel tubing with #4 satin finish. Hinged mounting brackets shall be 12 gauge type 304 stainless steel. Hooks firmly into place when in the up position to be stored safely out of the way. Solid Phenolic seat shall be 1/2" (13mm) thick and shall be fire and mildew resistant. Shower Seat shall comply with all applicable federal, provincial and local building and safety codes.



Woodgrain shown, Also available in White

Custom sizes are available to suit special requirements.

| | | | |
|-----------|-----------------|-----------|---------------------|
| 15" x 28" | (381mm x 711mm) | White | Model # 70-PA152801 |
| 15" x 28" | (381mm x 711mm) | Woodgrain | Model # 70-PH152815 |
| 15" x 32" | (381mm x 812mm) | White | Model # 70-PH153201 |
| 15" x 32" | (381mm x 812mm) | Woodgrain | Model # 70-PH153215 |

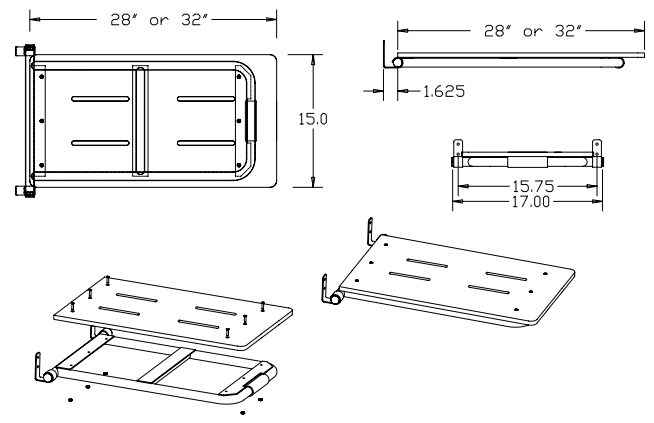

Elcoma Shower Seats have been designed and tested to withstand 250lbs. (114kgs) of load when properly installed.* This exceeds HUD, FHA, VA, ADA, ANSI and other federal, provincial, and local codes. *Shower seats can only be as strong as what they are mounted to. It is imperative when installing any shower seat to consult with a qualified contractor to insure you have sufficient backing.